
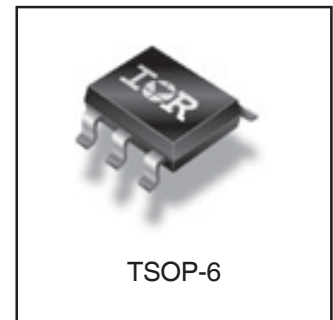


IRFTS9342PbF

HEXFET® Power MOSFET

| | | |
|--|-------------|-----------|
| V_{DS} | -30 | V |
| $V_{GS\ max}$ | ±20 | V |
| $R_{DS(on)\ max}$ (@ $V_{GS} = -10V$) | 40 | mΩ |
| $R_{DS(on)\ max}$ (@ $V_{GS} = -4.5V$) | 66 | mΩ |
| $Q_g\ typ$ | 12 | nC |
| I_D (@ $T_A = 25^\circ C$) | -5.8 | A |

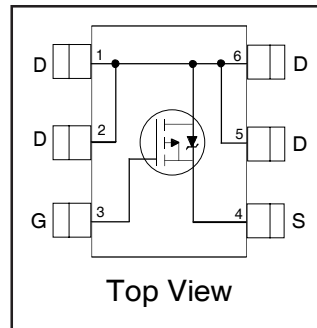

Applications

- Battery operated DC motor inverter MOSFET
- System/Load Switch

Features and Benefits

Features

| |
|--|
| Industry-Standard TSOP-6 Package |
| RoHS Compliant Containing no Lead, no Bromide and no Halogen |
| MSL1, Consumer Qualification |

results in
⇒

Benefits

| |
|----------------------------|
| Multi-Vendor Compatibility |
| Environmentally Friendlier |
| Increased Reliability |

| Orderable part number | Package Type | Standard Pack | | Note |
|-----------------------|--------------|---------------|----------|------|
| | | Form | Quantity | |
| IRFTS9342TRPbF | TSOP-6 | Tape and Reel | 3000 | |

Absolute Maximum Ratings

| | Parameter | Max. | Units |
|--------------------------|---|--------------|-------|
| V_{DS} | Drain-to-Source Voltage | -30 | V |
| V_{GS} | Gate-to-Source Voltage | ±20 | |
| $I_D @ T_A = 25^\circ C$ | Continuous Drain Current, $V_{GS} @ 4.5V$ | -5.8 | A |
| $I_D @ T_A = 70^\circ C$ | Continuous Drain Current, $V_{GS} @ 4.5V$ | -4.6 | |
| I_{DM} | Pulsed Drain Current ① | -46 | |
| $P_D @ T_A = 25^\circ C$ | Power Dissipation | 2.0 | W |
| $P_D @ T_A = 70^\circ C$ | Power Dissipation | 1.3 | |
| | Linear Derating Factor | 0.02 | W/°C |
| T_J | Operating Junction and | -55 to + 150 | °C |
| T_{STG} | Storage Temperature Range | | |

Notes ① through ④ are on page 2

Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|------------------------------|--------------------------------------|------|------|------|-------|--|
| BV_{DSS} | Drain-to-Source Breakdown Voltage | -30 | — | — | V | $V_{GS} = 0V, I_D = -250\mu A$ |
| $\Delta BV_{DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient | — | 19 | — | mV/°C | Reference to $25^\circ\text{C}, I_D = -1\text{mA}$ |
| $R_{DS(on)}$ | Static Drain-to-Source On-Resistance | — | 32 | 40 | mΩ | $V_{GS} = -10V, I_D = -5.8A$ ③ |
| | | — | 53 | 66 | | $V_{GS} = -4.5V, I_D = -4.6A$ ③ |
| $V_{GS(th)}$ | Gate Threshold Voltage | -1.3 | — | -2.4 | V | $V_{DS} = V_{GS}, I_D = -25\mu A$ |
| $\Delta V_{GS(th)}$ | Gate Threshold Voltage Coefficient | — | -5.5 | — | mV/°C | |
| I_{DSS} | Drain-to-Source Leakage Current | — | — | -1.0 | μA | $V_{DS} = -24V, V_{GS} = 0V$ |
| | | — | — | -150 | | $V_{DS} = -24V, V_{GS} = 0V, T_J = 125^\circ\text{C}$ |
| I_{GSS} | Gate-to-Source Forward Leakage | — | — | -100 | nA | $V_{GS} = -20V$ |
| | Gate-to-Source Reverse Leakage | — | — | 100 | | $V_{GS} = 20V$ |
| g_{fs} | Forward Transconductance | 6.8 | — | — | S | $V_{DS} = -10V, I_D = -4.6A$ |
| Q_g | Total Gate Charge | — | 12 | — | nC | $V_{DS} = -15V$ |
| Q_{gs} | Gate-to-Source Charge | — | 1.8 | — | | $V_{GS} = -10V$ |
| Q_{gd} | Gate-to-Drain Charge | — | 3.1 | — | | $I_D = -4.6A$ |
| R_G | Gate Resistance | — | 17 | — | Ω | |
| $t_{d(on)}$ | Turn-On Delay Time | — | 4.6 | — | ns | $V_{DD} = -15V, V_{GS} = -10V$ $I_D = -4.6A$ $R_G = 6.8\Omega$ |
| t_r | Rise Time | — | 13 | — | | |
| $t_{d(off)}$ | Turn-Off Delay Time | — | 45 | — | | |
| t_f | Fall Time | — | 28 | — | | |
| C_{iss} | Input Capacitance | — | 595 | — | pF | $V_{GS} = 0V$ |
| C_{oss} | Output Capacitance | — | 133 | — | | $V_{DS} = -25V$ |
| C_{riss} | Reverse Transfer Capacitance | — | 85 | — | | $f = 1.0\text{KHz}$ |

Diode Characteristics







| | Parameter | Min. | Typ. | Max. | Units | Conditions |
|----------|---|---|------|------|-------|---|
| I_S | Continuous Source Current (Body Diode) | — | — | -2.0 | A | MOSFET symbol showing the integral reverse p-n junction diode. |
| I_{SM} | Pulsed Source Current (Body Diode) ① | — | — | -46 | | |
| V_{SD} | Diode Forward Voltage | — | — | -1.2 | V | $T_J = 25^\circ\text{C}, I_S = -4.6A, V_{GS} = 0V$ ③ |
| t_{rr} | Reverse Recovery Time | — | 20 | 30 | ns | $T_J = 25^\circ\text{C}, I_F = -4.6A, V_{DD} = -24V$ |
| Q_{rr} | Reverse Recovery Charge | — | 11 | 17 | nC | $di/dt = 100A/\mu s$ ③ |
| t_{on} | Forward Turn-On Time | Time is dominated by parasitic inductance | | | | |

Thermal Resistance

| | Parameter | Typ. | Max. | Units |
|-----------------|-----------------------|------|------|-------|
| $R_{\theta JA}$ | Junction-to-Ambient ③ | — | 62.5 | °C/W |

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Pulse width $\leq 400\mu s$; duty cycle $\leq 2\%$.
- ③ When mounted on 1 inch square copper board.

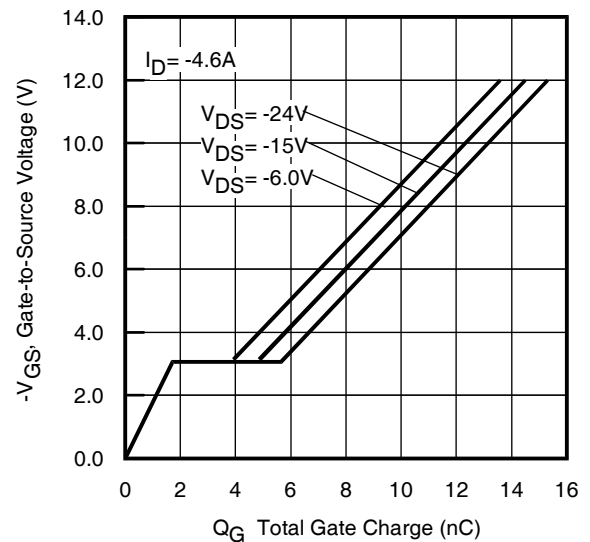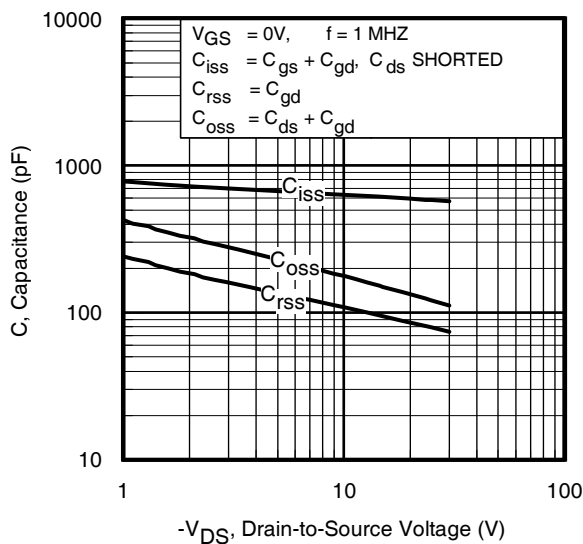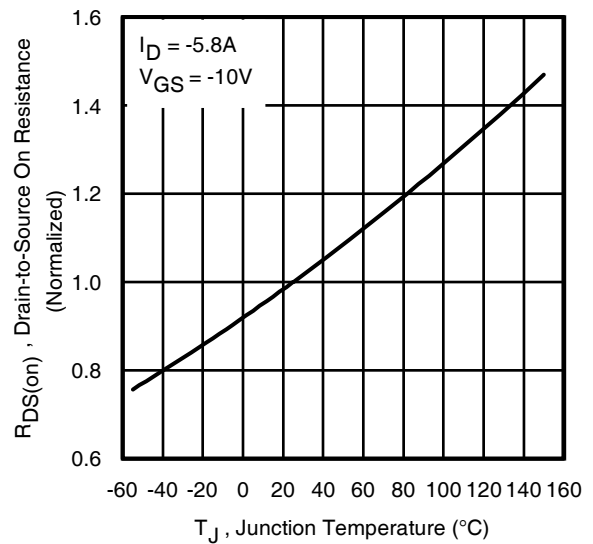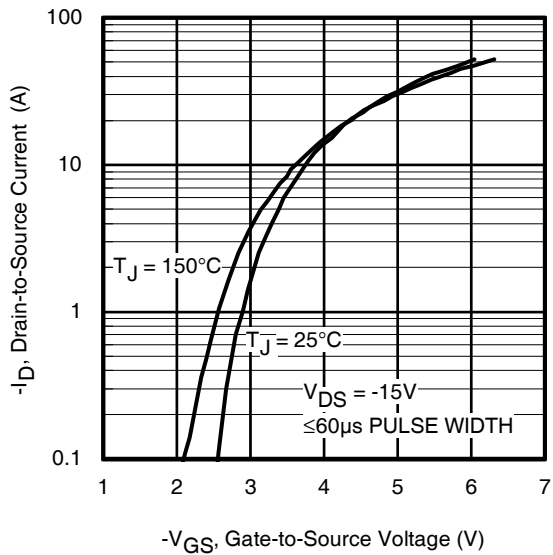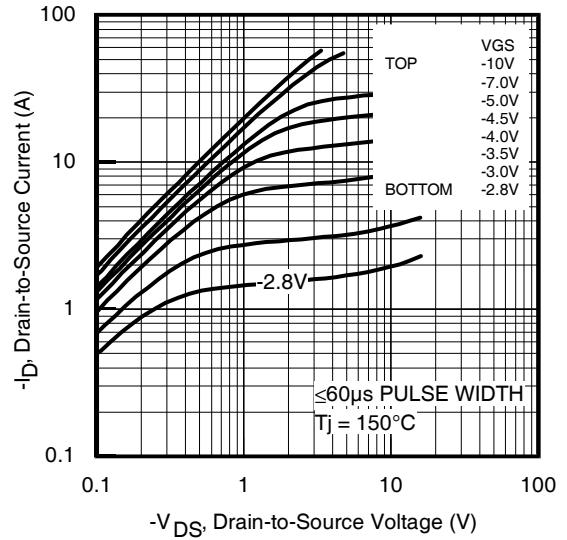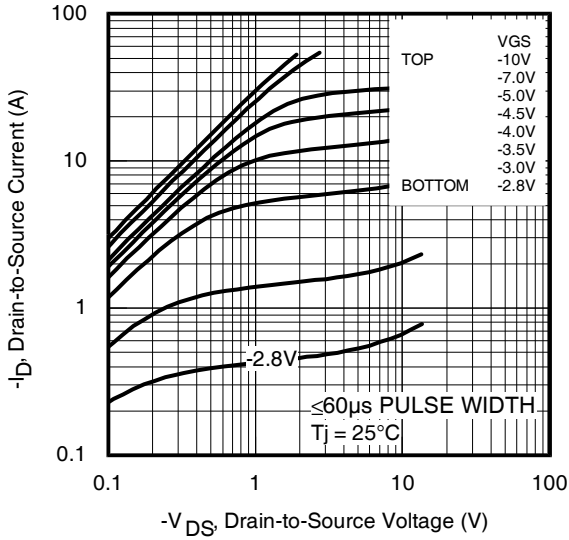

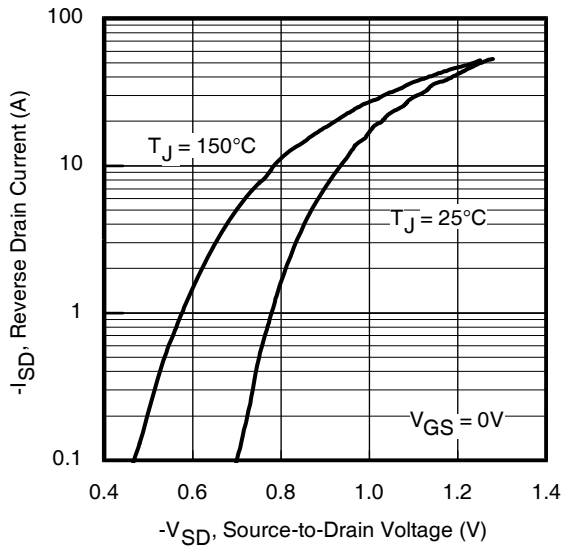


Fig 7. Typical Source-Drain Diode Forward Voltage

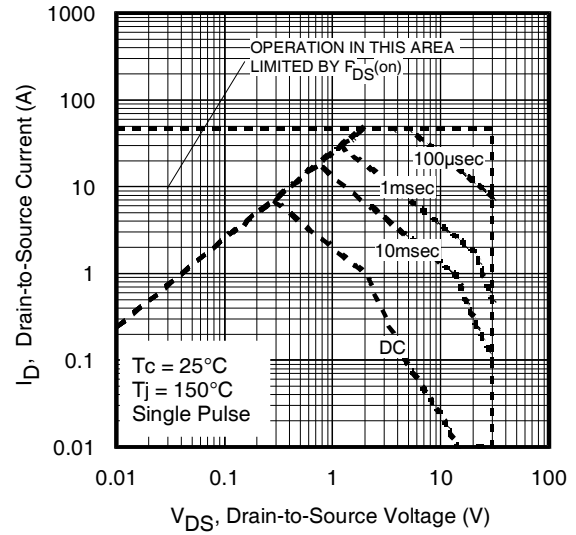


Fig 8. Maximum Safe Operating Area

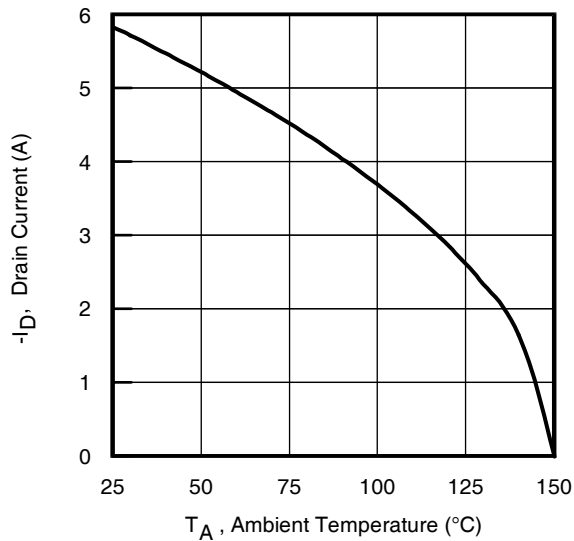


Fig 9. Maximum Drain Current vs. Case Temperature

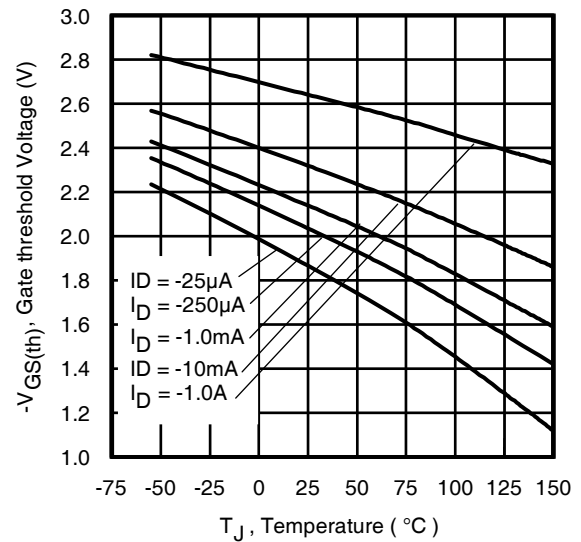


Fig 10. Threshold Voltage vs. Temperature

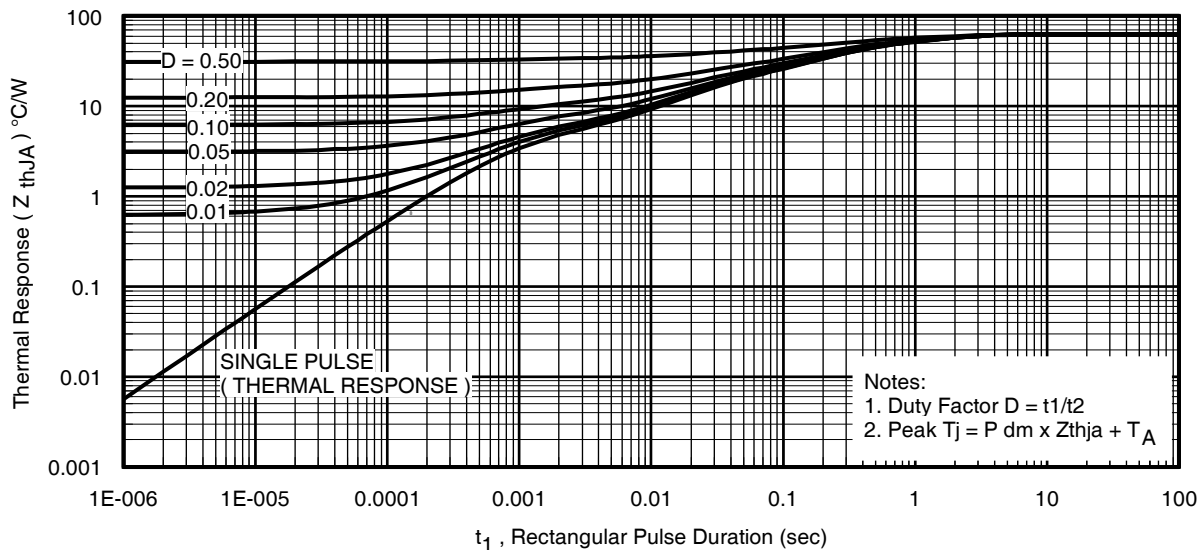


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

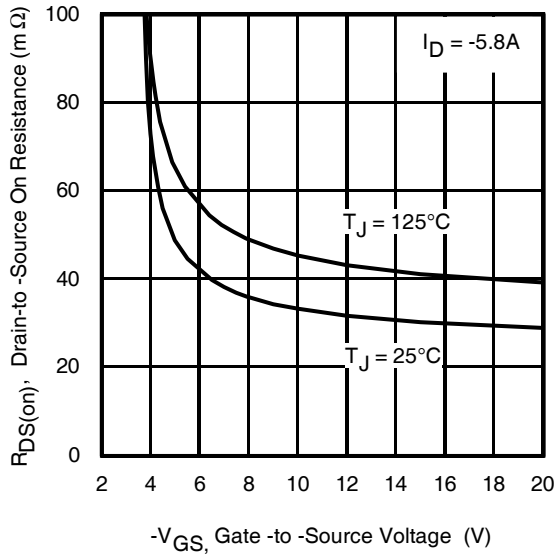


Fig 12. On-Resistance vs. Gate Voltage

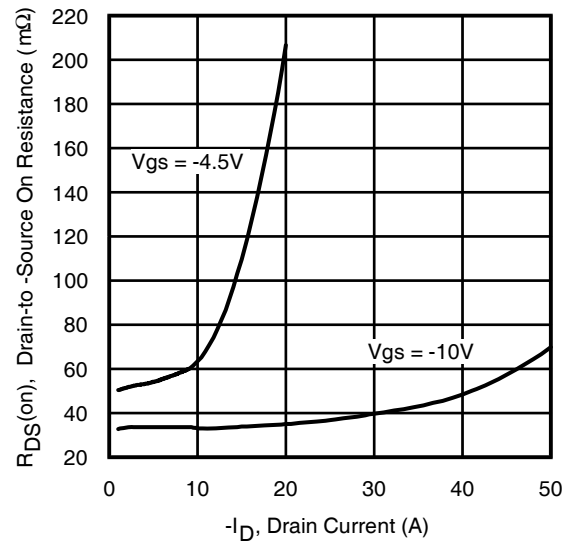


Fig 13. Typical On-Resistance vs. Drain Current

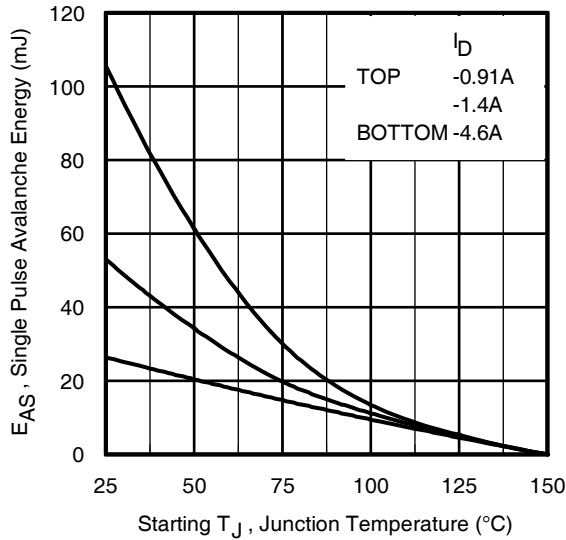


Fig 14. Maximum Avalanche Energy vs. Drain Current



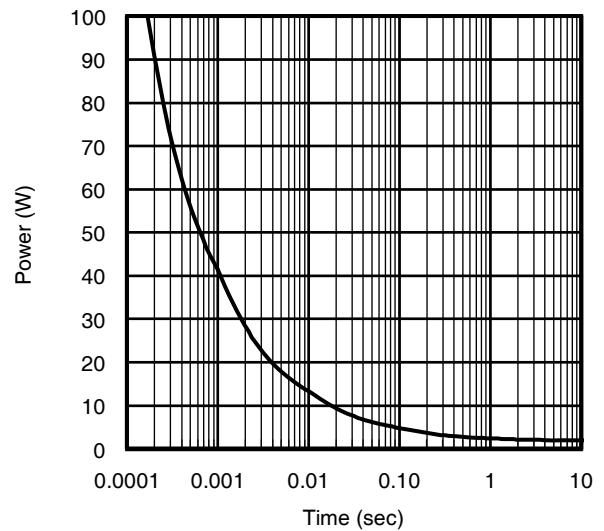


Fig 15. Typical Power vs. Time

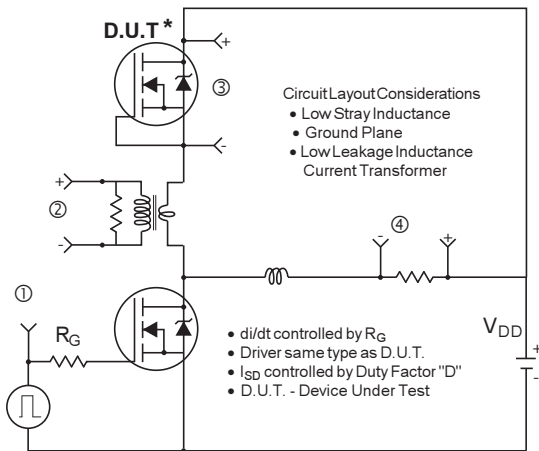

* Reverse Polarity of D.U.T for P-Channel

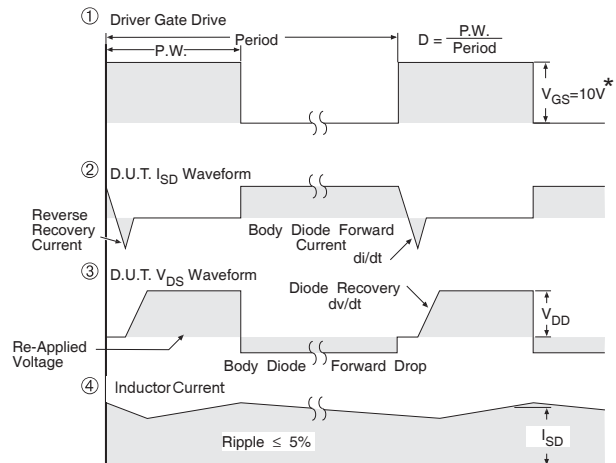

* $V_{GS} = 5V$ for Logic Level Devices

Fig 16. Diode Reverse Recovery Test Circuit for P-Channel HEXFET® Power MOSFETs

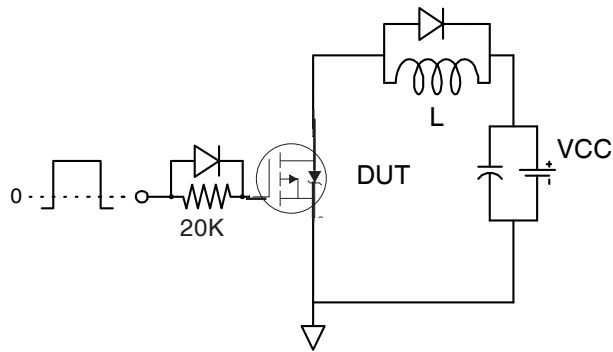


Fig 17a. Gate Charge Test Circuit

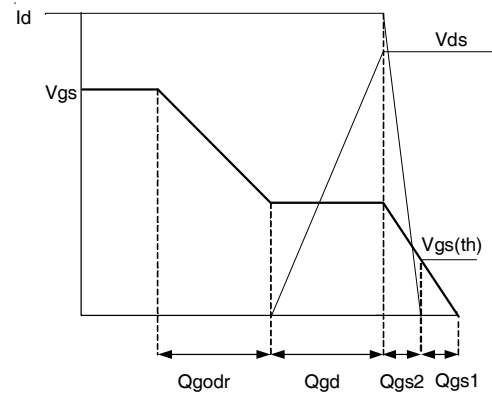


Fig 17b. Gate Charge Waveform

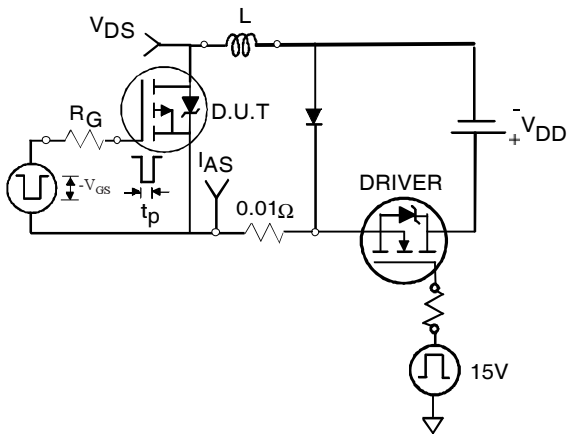


Fig 18a. Unclamped Inductive Test Circuit

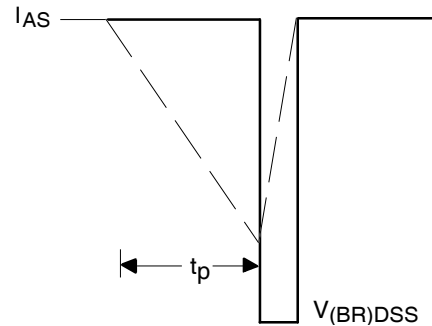


Fig 18b. Unclamped Inductive Waveforms

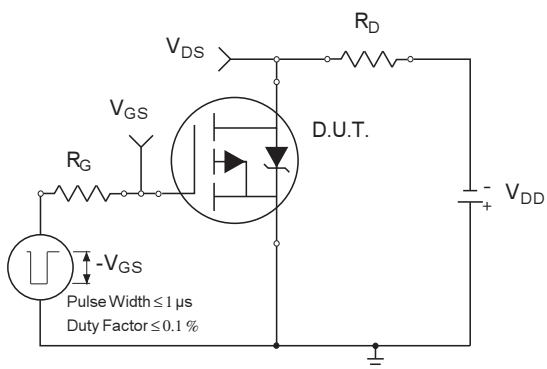


Fig 19a. Switching Time Test Circuit



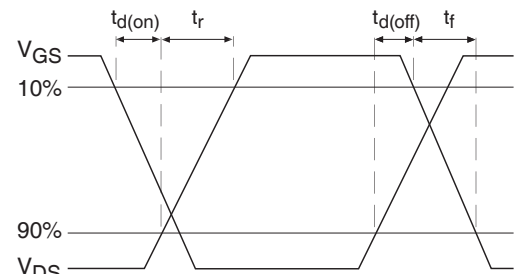


Fig 19b. Switching Time Waveforms


TSOP-6 Package Outline

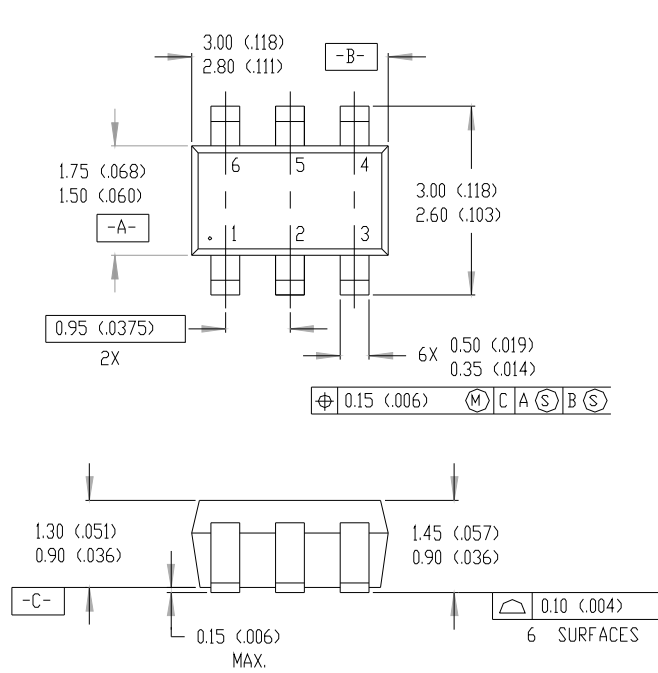

MINIMUM RECOMMENDED FOOTPRINT

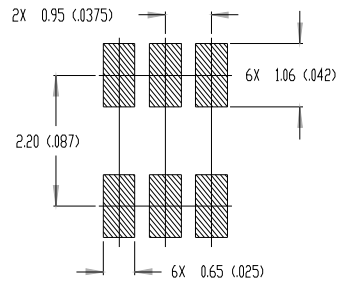


LEAD ASSIGNMENTS




NOTES:

1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS (INCHES).

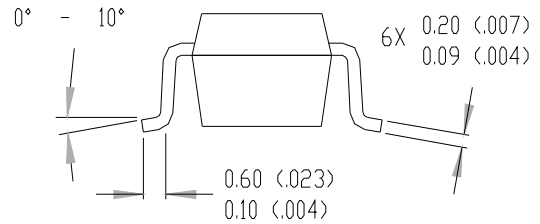

TSOP-6 Part Marking Information

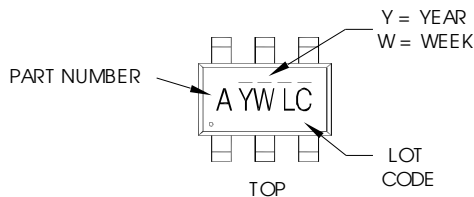

PART NUMBER CODE REFERENCE:

| | |
|--------------|--------------------|
| A = SI3443DV | O = IRLTS6342TRPBF |
| B = IRF5800 | P = IRFTS8342TRPBF |
| C = IRF5850 | R = IRFTS9342TRPBF |
| D = IRF5851 | S = Not applicable |
| E = IRF5852 | T = IRLTS2242TRPBF |
| F = IRF5801 | |
| G = IRF5803 | |
| H = IRF5804 | |
| I = IRF5805 | |
| J = IRF5806 | |
| K = IRF5810 | |
| N = IRF5802 | |

Note: A line above the work week (as shown here) indicates Lead-Free.

DATE CODE MARKING INSTRUCTIONS

WW = (1-26) IF PRECEDED BY LAST DIGIT OF CALENDAR YEAR

| YEAR | Y | WORK WEEK | W |
|------|------|-----------|---|
| 2011 | 2001 | 01 | A |
| 2012 | 2002 | 02 | B |
| 2013 | 2003 | 03 | C |
| 2014 | 2004 | 04 | D |
| 2015 | 2005 | 05 | |
| 2016 | 2006 | 06 | |
| 2017 | 2007 | 07 | |
| 2018 | 2008 | 08 | |
| 2019 | 2009 | 09 | |
| 2020 | 2010 | 24 | X |
| | | 25 | Y |
| | | 26 | Z |


WW = (27-52) IF PRECEDED BY A LETTER

| YEAR | Y | WORK WEEK | W |
|------|------|-----------|---|
| 2011 | 2001 | A 27 | A |
| 2012 | 2002 | B 28 | B |
| 2013 | 2003 | C 29 | C |
| 2014 | 2004 | D 30 | D |
| 2015 | 2005 | E | |
| 2016 | 2006 | F | |
| 2017 | 2007 | G | |
| 2018 | 2008 | H | |
| 2019 | 2009 | J | |
| 2020 | 2010 | K 50 | X |
| | | 51 | Y |
| | | 52 | Z |


Note: For the most current drawing please refer to IR website at: <http://www.irf.com/package/>

IRFTS9342PbF

TSOP-6 Tape and Reel Information

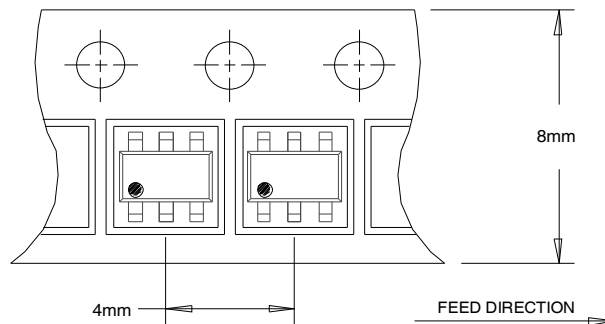

NOTES :
1. OUTLINE CONFORMS TO EIA-481 & EIA-541.

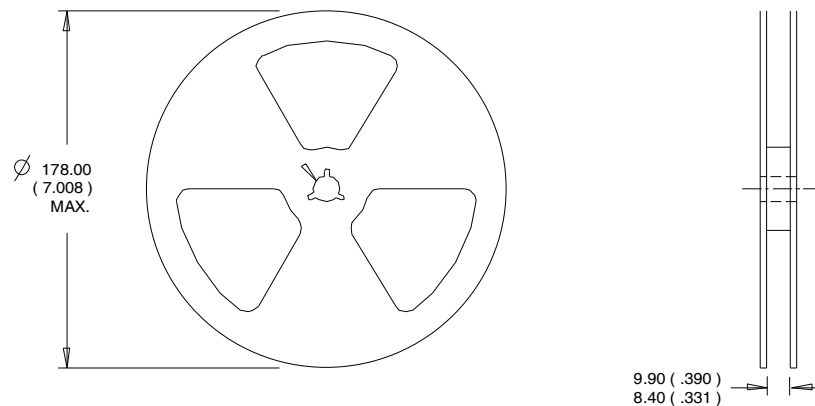

NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Qualification information[†]

| | | |
|----------------------------|--|--|
| Qualification level | Consumer ^{††} (per JEDEC JESD47F ^{†††} guidelines) | |
| Moisture Sensitivity Level | TSOP-6 | MSL1 (per IPC/JEDEC J-STD-020D ^{†††}) |
| RoHS compliant | Yes | |

[†] Qualification standards can be found at International Rectifier's web site

<http://www.irf.com/product-info/reliability>

^{††} Higher qualification ratings may be available should the user have such requirements.

Please contact your International Rectifier sales representative for further information:

<http://www.irf.com/whoto-call/salesrep/>

^{†††} Applicable version of JEDEC standard at the time of product release.

Data and specifications subject to change without notice.

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[IRFTS9342TRPBF](#)