


Selection Guide

Series	Model	Total Power	Voltage	Current	Highest Frequency	Current Slope	Resolution
UTL8500	UTL8512S	300W	150V	30A	10kHz	3A/μs	0.1mV 0.1mA
	UTL8511S	150W	150V	30A	10kHz	3A/μs	0.1mV 0.1mA
	UTL8513	600W	150V	120A	10kHz	1.5A/μs	0.1mV 0.1mA
	UTL8512	300W	150V	30A	10kHz	3A/μs	0.1mV 0.1mA
	UTL8511	150W	150V	30A	10kHz	3A/μs	0.1mV 0.1mA
	UTL8512B+	300W	500V	15A	10kHz	1.5A/μs	0.1mV 0.1mA
UTL8200	UTL8212	200W×2CH	150V	40A	10kHz	0.15A/μs	1mV 1mA
	UTL8211	400W	150V	20A	10kHz	0.15A/μs	1mV 1mA

UTL8500 Series Programmable DC Electronic Loads

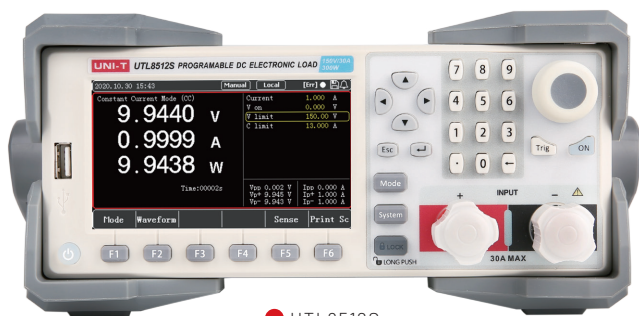

● UTL8512S

The UTL8500 is a cost-effective programmable DC electronic load series with high performance. With a resolution of 0.1mV and 0.1mA, multiple protection mechanisms significantly improve the reliability of the equipment. The series has a variety of testing functions and modes, equipped with RS-232 communication interface, and can be equipped with other communication interfaces according to design and testing requirements.


UTL8500 series provides a flexible, fast and effective solution. Meet different customer's needs from Education, Scientific Research and Manufacturing.

2020.10.30 15:43		Manual	Local	[Err]	🔔
Constant Current Mode (CC)					
9.9440 V		Current	1.000 A		
0.9999 A		V on	0.000 V		
9.9438 W		V limit	150.00 V		
Time:00002s		C limit	13.000 A		
		Vpp 0.002 V	Ipp 0.000 A		
		Vp+ 9.945 V	Ip+ 1.000 A		
		Vp- 9.943 V	Ip- 1.000 A		
Mode	Waveform	Sense		Print Sc	


- 4 basic modes: CC/CV/CR/CP and high resolution of 0.1mV/0.1mA

2020.10.30 16:11		Manual	Local	🔔
Battery Mode				
14.9640 V		Mode	CC	
1.0000 A		Load Value	1.000 A	
14.9650 W		Stop Voltage	12.000 V	
Capa:0.001Ah		Vpp 0.008 V	Ipp 0.000 A	
Time:00002s		Vp+ 14.968 V	Ip+ 1.000 A	
		Vp- 14.960 V	Ip- 1.000 A	
Mode		Curve	Sense	Print Sc


- Battery test function

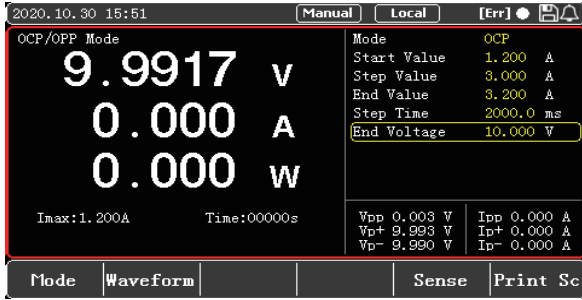


● Multiple protection test and ripple measurement functions

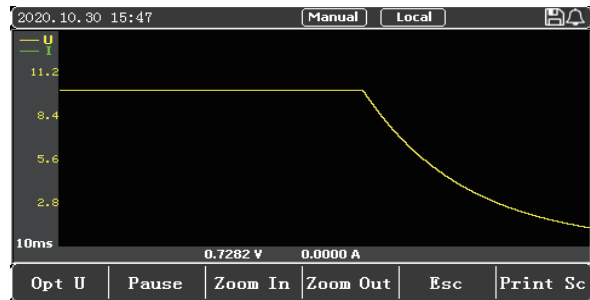

● Real-time waveform display function

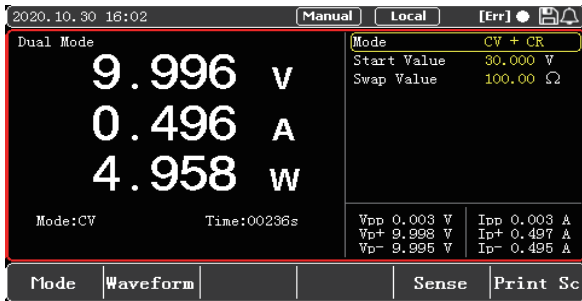

● Three combination modes

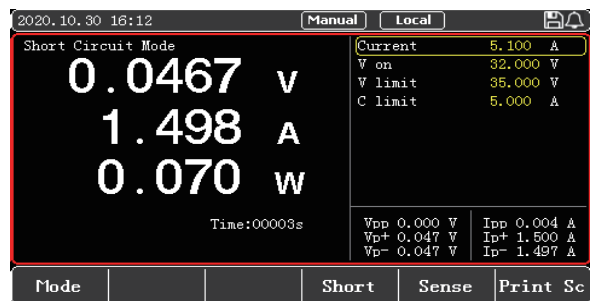

● Short circuit test

Key Specifications		UTL8511S	UTL8512S	UTL8511	UTL8512	UTL8512B+	UTL8513
Input ratings (0~40°C)	Input voltage	0~150V		0~150V	0~150V	0~500V	0~150V
	Input current	0~3A,0~30A		0~3A,0~30A		0~1.5A	0~15A
	Resolution	0.1mV, 0.1mA					
	Input power	150W	300W	150W	300W	300W	600W
	Min. operating voltage	1.4V at 30A		1.4V at 30A		3V at 15A	2.8V at 120A
CV mode	Range	0~18V, 0~150V				0~50V	0~500V
	Accuracy	±(0.05%+0.025%FS)					
CC mode	Range	0~3A,0~30A				0~1.5A	0~15A
	Accuracy	±(0.05%+0.05%FS)					
CR mode	Range	0.05Ω~7.5KΩ		0.05Ω~7.5KΩ		0.1Ω~25KΩ	0.05Ω~7.5KΩ
	Accuracy	0.1%+0.08%FS					
CP mode	Range	150W	300W	150W	300W	300W	600W
	Accuracy	±(0.1%+0.1%FS)					
Dynamic mode (CC mode)	T1&T2	50μS~99.999S/Res:1μS					
	Accuracy	5μS±100ppm					
	Rise/fall slope	0.001~3.0A/us				0.001~1.5A/us	
	Min rise time	≥10us					
Readback voltage	Range	0~18V,0~150V				0~50V	0~500V
	Accuracy	±(0.025%+0.025%FS)					
Readback current	Range	0~3A,0~30A				0~3A	0~15A
	Accuracy	±(0.025%+0.05%FS)				0.05%+0.05%FS	0.025%+0.05%FS
Readback power	Range	150W	300W	150W	300W	300W	600W
	Accuracy	±(0.1%+0.1%FS)					
Ripple wave measurement	Range	0~0.3V,0~9V		-			
	Accuracy	0.1%+2mV, 0.1%+10mV		-			