




WW158B-M01E (5A/250V)

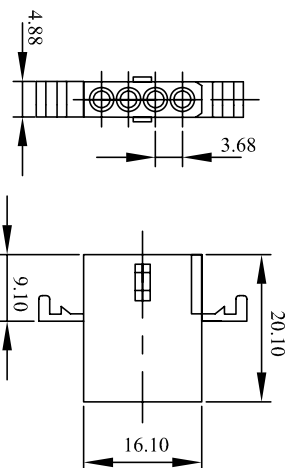

WW158B-M04E (5A/250V)



WW158B-M06E (5A/250V)



Specification:

Material: Nylon 66 UL94V-2

Current rating: 5A AC, DC Max

Voltage Rating: 300V AC, DC Max

Contact resistance: 15mΩ Max


Insulation resistance: 1000MΩ Min

Withstanding voltage: 1500V AC/Minute


Temperature range: -25°C to +85°C

Applicable panel thickness: 2 mm max









WW158B-M02E (5A/250V)

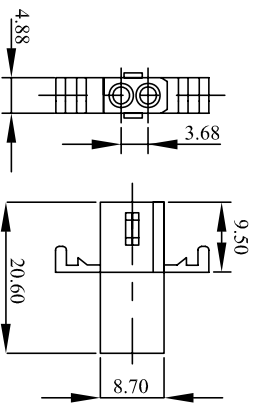

WW158B-M04-1E (5A/250V)

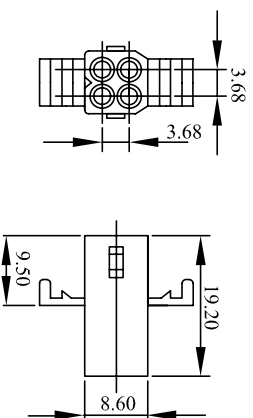

WW158B-M09E (5A/250V)

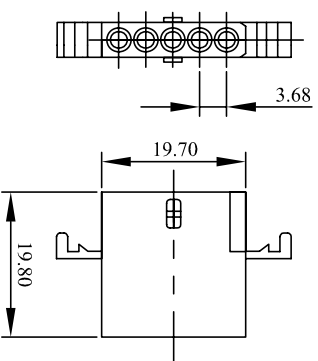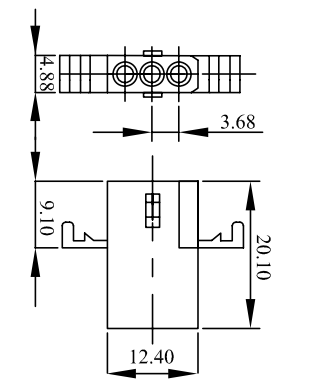

WW158B-M03E (5A/250V)

WW158B-M05E (5A/250V)

WW158B-M12E (5A/250V)

WW158B-M15E (5A/250V)

REV	DESCRIPTION/DATE	DRAWN BY: STORMLI	CUSTOMER:	THIRD ANGLE PROJECTION	UNITS: MM
△		CHECKED BY: SIMMON	PART NO.:		X X X X X X X X
△		APPROVED BY: TONY	TITLE:		±0.25 ±0.1 ±0.08

SGS REPORT NO.: KA/2004-80788/A-2

WW158B-M(E) Series

Housing

1 2 3 4 5 6 7 8 9 10 11 12 13 14