




WW158B-M01E (5A/250V)

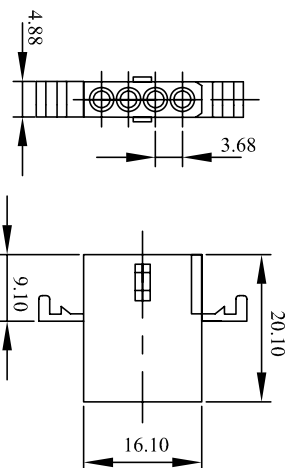

WW158B-M04E (5A/250V)



WW158B-M06E (5A/250V)



Specification:

Material: Nylon 66 UL94V-2

Current rating: 5A AC, DC Max

Voltage Rating: 300V AC, DC Max

Contact resistance: 15mΩ Max


Insulation resistance: 1000MΩ Min

Withstanding voltage: 1500V AC/Minute


Temperature range: -25°C to +85°C

Applicable panel thickness: 2 mm max









WW158B-M02E (5A/250V)

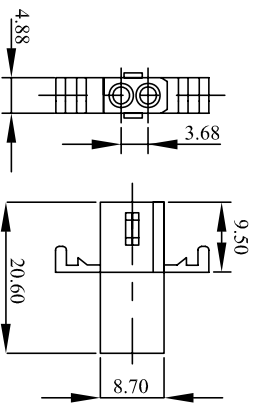

WW158B-M04-1E (5A/250V)

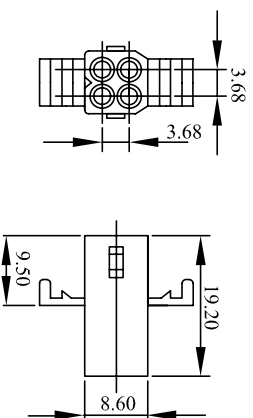

WW158B-M09E (5A/250V)

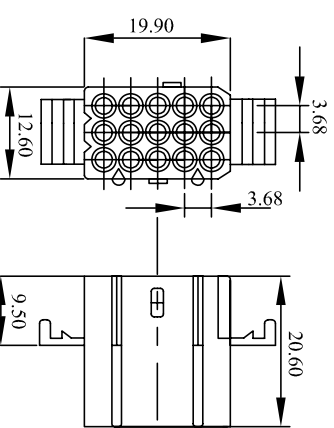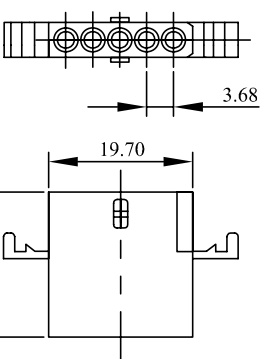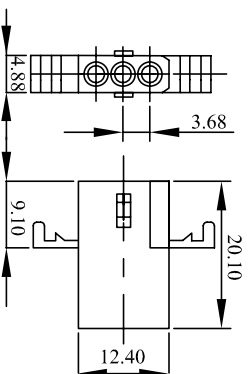

WW158B-M03E (5A/250V)

WW158B-M05E (5A/250V)

WW158B-M12E (5A/250V)

WW158B-M15E (5A/250V)

|     |                  |                    |                              |                             |                                 |
|-----|------------------|--------------------|------------------------------|-----------------------------|---------------------------------|
| REV | DESCRIPTION/DATE | DRAWN BY: STORMLI  | CUSTOMER:                    | THIRD ANGLE PROJECTION      | UNITS: MM                       |
| △   |                  | CHECKED BY: SIMMON | PART NO.: WW158B-M(E) Series | GENERAL DIMENSION TOLERANCE | X.X ±0.25 X.XX ±0.1 X.XXX ±0.08 |
| △   |                  | APPROVED BY: TONY  | TITLE: Housing               |                             |                                 |

SGS REPORT NO.: KA/2004-80788/A-2