

WW158B-M01E (5A/250V)

WW158B-M04E (5A/250V)

WW158B-M06E (5A/250V)

Specification:

Material: Nylon 66 UL94V-2

Current rating:

5A AC, DC Max

Voltage Rating:

300V AC, DC Max

Contact resistance:

15mΩ Max

Insulation resistance:

1000MΩ Min

Withstanding voltage :






1500V AC/Minute

Temperature range:

-25°C to +85°C

Applicable panel thickness:






2 mm max

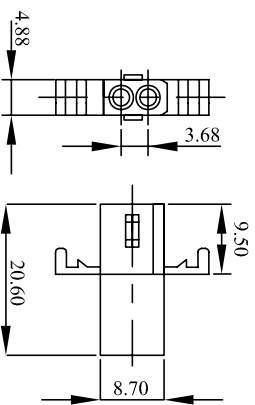

WW158B-M02E (5A/250V)

WW158B-M04-1E (5A/250V)



WW158B-M09E (5A/250V)

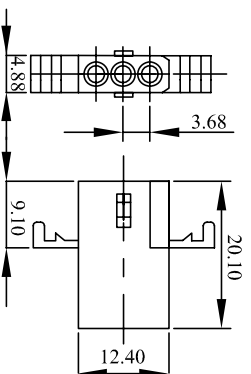

WW158B-M03E (5A/250V)

WW158B-M05E (5A/250V)

WW158B-M12E (5A/250V)



WW158B-M15E (5A/250V)

REV DESCRIPTION/DATE DRAWN BY: STORMLI

CHECKED BY: SIMMON

APPROVED BY: TONY

CUSTOMER: PART NO.: WW158B-M(E) Series TITLE: Housing

THIRD ANGLE PROJECTION

GENERAL DIMENSION TOLERANCE

UNITS: MM

X X ±0.25

X X X ±0.1

X X X X ±0.08

SGS REPORT NO.: KA/2004-80788/A-2