

Connector

Female Header Series




KLS1-208-3.5 2.54 Female Header H3.5mm DIP Type

Electrical Characteristics:



Current Rating: 3 Amps
Withstanding Voltage: AC 1000V
Insulator Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operating Temperature: -45°C~+105°C

Material:

Insulator Material: Polyester (UL94V-0)
Standard: PBT
Contact Material: Brass
Contact Plating: Flash gold

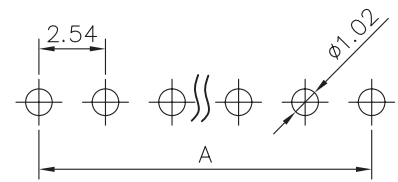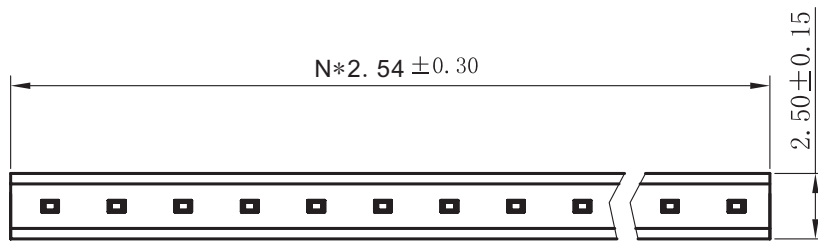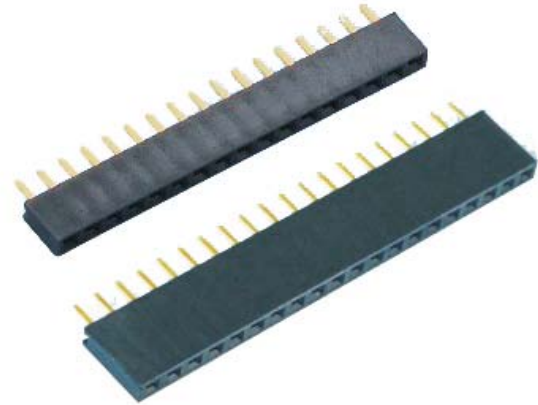


RECOMMEND P. C. BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

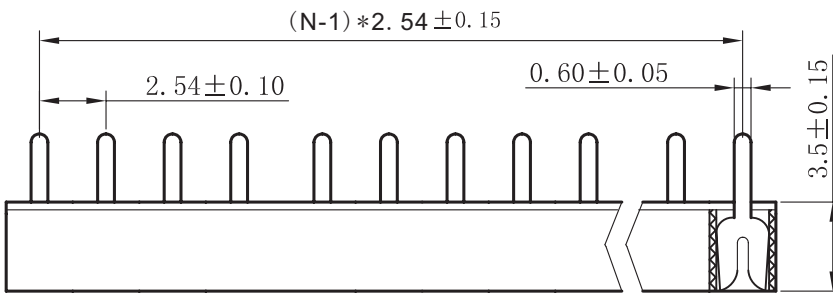

ORDER INFORMATION

Product NO.: KLS1-208-3.5-1-XX-S

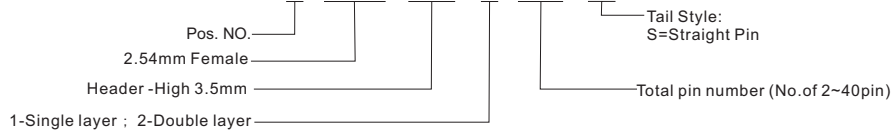

Connector

Female Header Series




KLS1-208-3.5 2.54 Female Header H3.5mm DIP Type

Electrical Characteristics:



Current Rating: 3 Amps
Withstanding Voltage: AC 1000V
Insulator Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operating Temperature: -45°C~+105°C

Material:

Insulator Material: Polyester (UL94V-0)
Standard: PBT
Contact Material: Brass
Contact Plating: Flash gold

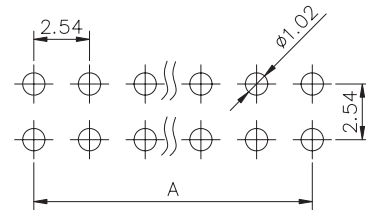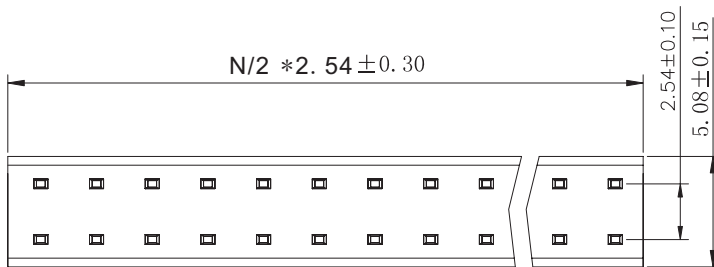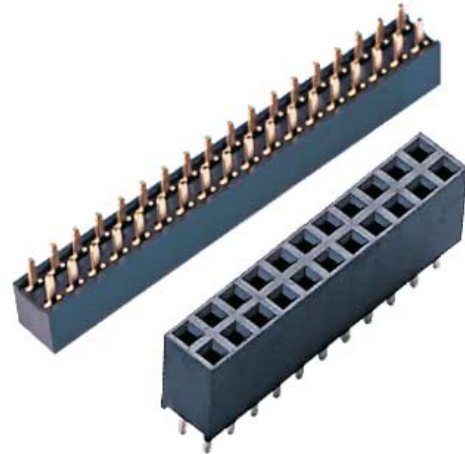

RECOMMEND P. C. BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

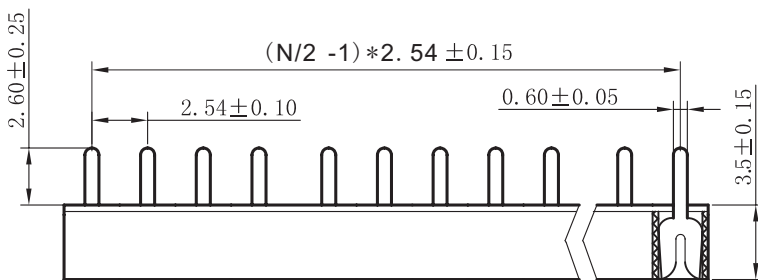

ORDER INFORMATION

Product NO.: KLS1-208-3.5-2-XX-S

