
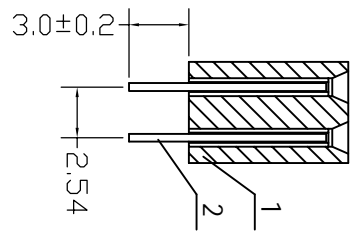
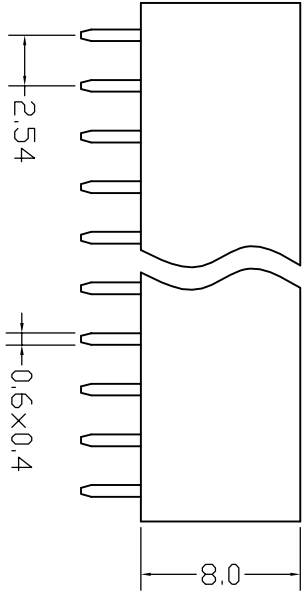


序号/rev.No.	名称/Title	文件编号/File No.
1	114双排塑料件	QJ/XYT-11125
2	114端子图(直)	QJ/XYT-11128

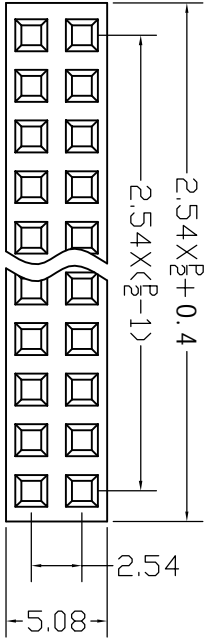

Specifications:
 Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1A/MP

Dielectric Withstanding
 Voltage: AC 500V For 1 minute
 Operating Temperature: -55°C--+105°C
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

- 要求:
1. 塑料件无裂痕。
 2. 整排针成一直线，相邻针之间相互平行。

设计/Designed by	绘图/Draw ing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X: ±0.2 X* ±2 .X ±0.1 .X* ±1 .XX ±0.05 .XX* ±0.5 .XXX ±0.01
图名/Title		文件编号/File No.		
114-A-DSXXG				
备注/Remark		页序/Sheet		单位/Units: mm
序号/Rev.No.		更改记录/Revision note		签名/Signature
				日期/Date



新亚电子
 XINYA ELECTRONIC CO.,LTD