


UT116 SERIES SMD TESTERS



- 36V DC voltage measurement
- Battery measurement (10mA) (UT116C)
- Resistance, capacitance (UT116C: up to 100mF), continuity, diode measurement
- The pen can be rotated by 180°, which is convenient for reading and diode/LED
- zener diode polarity test




| | UT116A | UT116C |
|------------------------------|--------------------------|---------------------|
| Display count | 3000 | 6000 |
| Resistance | 30MΩ | 60MΩ |
| Capacitance | 30mF | 100mF |
| Diode test | 3V | 3.2V |
| LED/stabilivolt | About 21V/1mA | About 21V/1mA |
| Continuity Test | <30Ω | <50Ω |
| DCV | 36V | |
| Battery test | | Load current ≈ 10mA |
| Auto range | √ | √ |
| Auto scan identification | √ | |
| Auto power off | √ | √ |
| Power | 1.5V battery (R03) x 2 | |
| Display | 39mm x 20mm | |
| Product color | Red and grey | |
| Product net weight | About 80g | |
| Product size | 204mm x 33mm x 25mm | |
| Standard accessories | Battery | |
| Standard individual packing | Gift box, English manual | |
| Standard quantity per carton | 60pcs | |
| Standard carton measurement | 440mm x 420mm x 210mm | |
| Standard carton gross weight | About 7.1kg | |

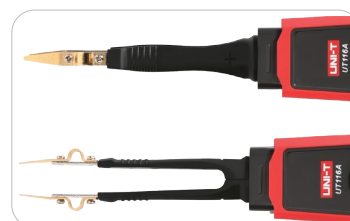

The pen can be rotated by 180° for easy reading and operation



Probe attachment

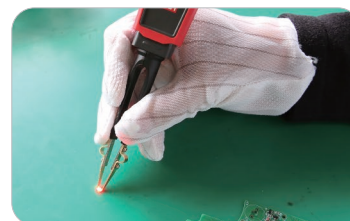

LED measurement